




Connecting Rods for Derail Operating and Target Stands

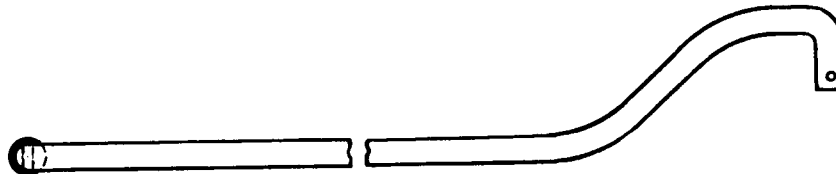

Connecting Rod for all Operating Stands and Sliding Derails: this is a 1 inch rod threaded carrying an adjustable screw jaw with jam nut and 7/8 inch pin with cotter at each end. Lengths are from center to center of holes for 7/8 inch pins.

Center of lamp staff to center of track	Length of rod c to c of end holes	Weight of rod	Weight of 1 additional foot of rod
Standard form 5' - 10"	5' - 2"	17.8 pounds	2.7 pounds
Close-coupled form 3' - 7-1/4"	3' - 1"	12.3 pounds	2.7 pounds



Connecting Rod for Target Stand and Sliding Derail: this is a 3/4 inch rod made as shown here.

Center of lamp staff to center of track	Length of rod c to c of ends	Weight of rod	Weight of 1 additional foot of rod
5' - 10-1/4"	5' - 2"	9.4 pounds	1.5 pounds



Connecting Rod for Target Stand and Hinge Derail: this is a 3/4 inch rod curved to fit various sizes of hinge derails. Size 5 is shown here.

Center of lamp staff center of track	Length of rod c to c of ends	Weight of rod	Weight of 1 additional foot of rod
5' - 10-1/4"	4' - 1-1/4"	7.3 pounds	1.5 pounds